


# FEATURES AND BENEFITS

## FOR CHALLENGER MT700 AND MT800 SERIES



### High-grade rubber compounds

Maximizes performance and durability




### Long lasting tread bar

Wear-resistant tread compound combined with a design geared towards your application



### Strengthened guide lugs

Enhanced guide lug geometry reduces risk of torn guide lugs




### Longest lasting carcass

Most durable, consistent and predictable performance due to Camso's unique manufacturing and curing process



### High tensile strength main cables

Designed to resist high tension and tractive effort, typical to friction drive  
**6500** – 16.5 in. and 18 in. row crop and 30 in. scraper come standard with an industry-leading 6.7 mm main cable to minimize carcass tear

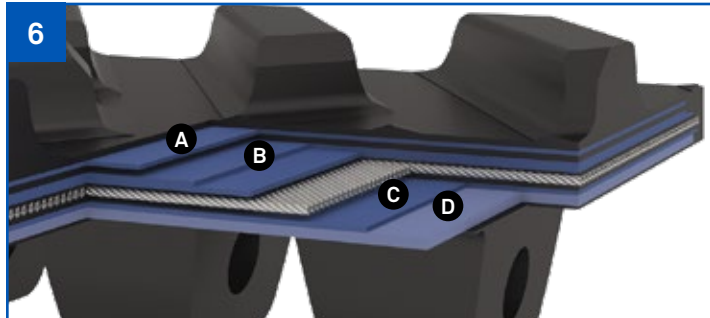

























### Impact-resistant carcass

- A** Steel reinforcement ply for added rigidity and stubble damage resistance
- B 6500 only:** Fatigue-resistant reinforcement for extended track life and increased load-bearing capacity
- C** High-impact steel reinforcement to reduce the risk of carcass tear and separation
- D 6500 only:** puncture-resistant rubber layer to reduce the risk of carcass tear and separation in very demanding applications

# THE RIGHT TRACK FOR YOUR APPLICATION

FOR CHALLENGER MT700 AND MT800 SERIES

TRACK SERIES	APPLICATIONS	SUGGESTED ANNUAL HOUR USAGE	FEATURES	PERFORMANCE
<b>CAMSO AG 6500</b> Unmatched performance, durability and reliability	Scraper, ripper, heavy tillage and row crop	1000+	 1  2  3  4  5  6	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 
<b>CAMSO AG 4500</b> High performance, value-driven	General tillage and row crop	500 to 1000	 1  2  3  4  6	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 
<b>CAMSO AG 2500</b> Competitive performance, for less	Secondary tillage and general row crop	100 to 500	 1  2  3  4	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 



TECHNICAL SPECIFICATIONS

# CHALLENGER MT700 AND MT800 SERIES

CAMSO Track series	AGCO Tractor model	Track width (in.)	Part number	Tread				Guide lugs		Carcass		
				Qty	Height (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Bias ply	Main cable size (mm)	Thickness (mm)
6500	MT700	14.5	E14AR02909 (LH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		14.5	E14AR02908 (RH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		16.5	E16AR02920 (LH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		16.5	E16AR02919 (RH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		18	E18AR02923	92	3	2.5	7.8	46	5.5	4	6.7	44
		18	E18AR02925 High Roding (LH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		18	E18AR02924 High roding (RH)	46	3	2.5	7.8	46	5.5	4	6.7	44
		25	E25AR02990 High roding	92	3	2.5	7.8	46	5.5	4	5.4	42
		25	E25AR02989	92	2.7	1.6	7.8	46	5.5	4	5.4	42
	30	E30AR02994 High roding	92	2.7	1.6	7.8	46	5.5	4	5.4	41	
	30	E30AR02993	46	2.7	1.6	7.8	46	4.7	4	5.4	42	
	34	E34AR03102	92	58	41	195	46	119	3	5.4	31	
	MT800	18	E18AS02930	100	3	2.5	8	52	5.5	4	6.7	44
		25.5	E25AS03180	100	2.7	1.6	8	52	5.5	4	5.4	42
		27.5	E27AS02997 High roding	100	3	2.5	8	52	5.5	4	5.4	42
		27.5	E27AS02996	100	2.7	1.6	8	52	5.5	4	5.4	42
		30	E30AS03000 High roding	100	3	2.5	8	52	5.5	4	5.4	42
		30	E30AS02999	100	2.7	1.6	8	52	5.5	4	5.4	42
30		E30AS02932 Scraper	100	2.2	2.8	8	52	5.5	4	6.7	44	
36		E36AS03002 High roding	100	3	2.5	8	52	5.5	4	5.4	42	
36		E36AS02934 Scraper	100	2.2	2.8	8	52	5.5	4	6.7	44	
4500	MT700	16.5	F16AR02922 (LH)	46	2.7	1.6	7.8	46	4.7	4	5.4	37
		16.5	F16AR02921 (RH)	46	2.7	1.6	7.8	46	4.7	4	5.4	37
		18	F18AR02926	92	2.7	1.6	7.8	46	4.7	4	5.4	37
		18	F18AR02927 Low Ground Disturbance	130	1.5	2.8	5.5	46	4.7	4	5.4	37
		24	F24AR02868	92	2.7	1.6	7.8	46	4.7	4	5.4	37
		25	F25AR02992 Low Ground Disturbance	130	1.6	2.76	5.5	46	4.7	4	5.4	37
		25	F25AR02991	92	2.7	1.6	7.8	46	4.7	4	5.4	37
		25	F25AR02928	92	2.7	1.6	7.8	46	5.5	4	5.4	37
		30	F30AR02995	92	2.7	1.6	7.8	46	4.7	4	5.4	37
	30	F30AR02929	92	2.7	1.6	7.8	46	5.5	4	5.4	37	
	34	F34AR03101	46	2.7	1.6	7.8	46	4.7	4	5.4	37	
	MT800	25.5	F25AS03179	100	2.7	1.6	8	52	4.7	4	5.4	37
		27.5	F27AS02998	100	2.7	1.6	8	52	4.7	4	5.4	37
		27.5	F27AS02931	100	2.7	1.6	8	52	5.5	4	5.4	37
		30	F30AS03001	100	2.7	1.6	8	52	4.7	4	5.4	37
30		F30AS02933	100	2.7	1.6	8	52	5.5	4	5.4	37	
36		F36AS03003	100	2.7	1.6	8	52	4.7	4	5.4	37	
2 500	MT700	16	A16AR03293	92	2.3	1.6	7.8	46	4.7	3	5.4	31
		18	A18AR03294	92	2.3	1.6	7.8	46	4.7	3	5.4	31
		25	A25AR03295	92	2.3	1.6	7.8	46	4.7	3	5.4	31
		30	A30AR03306	92	2.3	1.6	7.8	46	4.7	3	5.4	31
	MT800	27.5	A27AS03296	100	2.3	1.6	8	52	4.7	3	5.4	31
		30	A30AS03297	100	2.3	1.6	8	52	4.7	3	5.4	31

DRIVEN BY QUALITY


# PERFORMANCE AND DURABILITY FROM THE INSIDE OUT

## Camso longest lasting carcass

No material displacement during the manufacturing and curing process means:

- Rubber compounds located exactly where you need them
- Uniform tension distribution, minimizing downtime due to carcass tear
- A product with increased durability and performance

**CAMSO'S UNIQUE SINGLE CURE PROCESS**

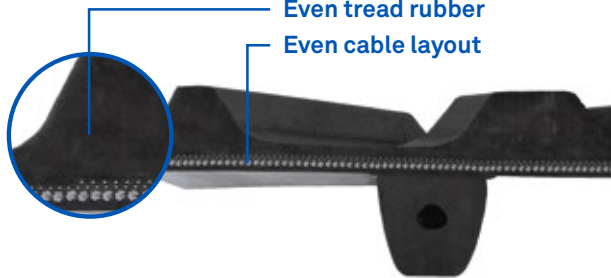

**X-RAY**

**COMPETITOR MOLDING PROCESS**



**X-RAY**

**DURABLE, CONSISTENT AND PREDICTABLE PERFORMANCE**

Warranty: Camso is the industry standard for warranty coverage on Agricultural tracks. Tracks are warrantied against defects in materials and workmanship, and prorated based on both time and usage, so customers receive fair value on warranty replacement tracks. Some conditions apply. Refer to the warranty certificate for details. For more info, visit [camso.co/agriculture](http://camso.co/agriculture)